


Proceedings

AFITA 2010

International Conference

**The Quality Information for Competitive Agricultural
Based Production System and Commerce**

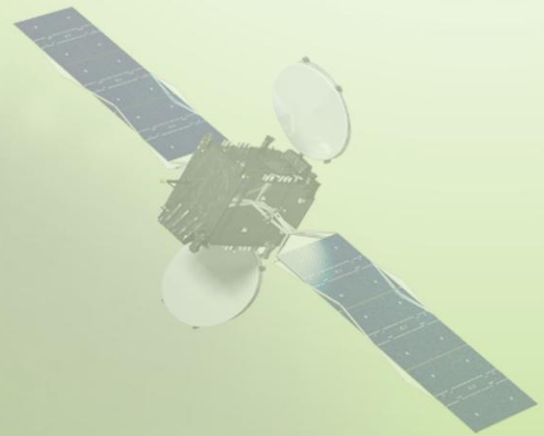

IPB International Convention Center (IICC),
Baranangsiang, Bogor - Indonesia
October 4 - 7, 2010

Organized by :

AFITA





Proceedings of AFITA 2010 International Conference

The Quality Information for Competitive Agricultural Based Production System and Commerce

Reviewers:

Kudang Boro Seminar
Edi Abdurachman
Bambang Pramudya
Setyo Pertiwi
Agus Buono
Seisai Ninomiya
Ye-Nu Wan
Kazuhiko Nakano
Byong Lyol Lee
Teruaki Nanseki
Adinarayana J.
Michael Riggs
Xinwen Yu

Copyright © 2010

Editors:

I Wyan Astika
Rizky Mulya Sampurno
Agus Ghautsun Ni'am
Indra Febrian Buntuan

Layouting:

Priyo Puji Nugroho
Rizky Mulya Sampurno

Published by :

AFITA (Asian Federation for Information Technology in Agriculture)
ISAI (Indonesian Society of Agriculture Informatics)
Bogor Agriculture University, West Java-Indonesia

Phone/fax: +62 251 8623936, Email: afita2010@ipb.ac.id
Website: <http://afita2010.ipb.ac.id/>

ISBN 978-979-493-277-3

Hak Cipta Dilindungi Undang-Undang
1. Dilarang mengutip sebagian atau seluruh karya tulis ini tanpa mencantumkan dan menyebutkan sumber:
a. Pengutipan hanya untuk kepentingan pendidikan, penelitian, penulisan karya ilmiah, penyusunan laporan, penulisan kritik atau tinjauan suatu masalah.
b. Pengutipan tidak merugikan kepentingan yang wajar IPB.
2. Dilarang mengumumkan dan memperbanyak sebagian atau seluruh karya tulis ini dalam bentuk apapun tanpa izin IPB.



Forewords

The role of communication and information technology (ICT) is becoming more and more crucial for agriculture to enable the best managerial and operational scenarios. This conference is aimed to seek excellent or promising ICT-based solutions for improving agricultural-based production systems and commerce. For the purpose, as those written in the first announcements of the AFITA 2010 Conference, the committee invited contributing papers under several topics related to the applications of ICT in agriculture.

It is a great pleasure for me to announce that the committee has received plenty of papers under the topics offered. But, due to the unbalance number of papers within each topic, the grouping were rearranged, and finally ended up with the following topic groups: 1) Rural Economies and ICT Policies for Rural Development (5 papers) 2) Knowledge Repositories (4 papers), 3) Remote Sensing and GIS Applications For Agriculture and Precision Farming (7 papers), 4) E-Agricultural Services and Business (11 papers), 5) Decision Support Systems for Agriculture and Agribusiness (9 papers), 6) Computer Based Data Acquisition and Control in Agriculture (7 papers), and 7) Modeling and Simulation (9 papers).

Besides the technical papers above, this proceedings also compiles invited papers and workshop materials discussed in the conference. Several posters without papers are also displayed in the seminar venue making the conference becoming more eventful.

I would like to express my sincere gratitude and thanks to all parties that make this conference possible. May our efforts will give a valuable contribution to the development of agricultural sector and to the development science as well.

Bogor, October 2010
Conference Chair,

Prof. Kudang Boro Seminar

Hak Cipta Dilindungi Undang-Undang

1. Dilarang mengutip sebagian atau seluruh karya tulis ini tanpa mencantumkan dan menyebutkan sumber:

a. Pengutipan hanya untuk kepentingan pendidikan, penelitian, penulisan karya ilmiah, penyusunan laporan, penulisan kritik atau tinjauan suatu masalah.
b. Pengutipan tidak merugikan kepentingan yang wajar IPB.

2. Dilarang mengumumkan dan memperbanyak sebagian atau seluruh karya tulis ini dalam bentuk apapun tanpa izin IPB.



Contents

Forewords	i
Contents	ii
Invited Speaker	
Needs of Quality Information in Sustainable Agro-ecosystem Services.....	2
Counterknowledge in Agriculture Policy Process.....	7
Workshop: ICT Adoption in Agriculture and Agribusiness	
Indonesian E-Agriculture Strategic Framework: A Direction of ICT Usage as Enabler in Agriculture	11
The CARD RING as a Support Tool for Building Integrated Information Systems	18
Rural Economies and ICT Policies for Rural Development	
Using the Sustainable Livelihoods Framework to Analyze ICT Applications for Promotion of Agricultural Livelihoods of Rural Community in China	25
Benefits of Integrated ICT Systems for Farmers, Advisors and Vertical and Horizontal Chain Partners	33
Advanced Application of ICT to The Sustainable Production of Excellent Japanese Mandarin	39
Sustainability of ICT Design Interventions in Agriculture with Poor – The Challenges and Ways Forward.	46
Role of ICT in Agricultural Sector: A Study of Progressive Farmers, Malwa Region, Punjab	47
Development of an Online Agricultural ICT Literacy Test System for Korean Farmers.....	54
Knowledge Repositories	
Collecting Japanese Terms used in Agricultural Programs	60
Analyzing a Text on Agricultural Issues Using Knowledge Graph	64
Collaborative Construction and Sharing of Chinese Agricultural and Standard Scitech Data Platform	65
An Approach to Extraction of Synonymous Relationships Using Japanese - English	
Bilingual Titles of Agricultural Academic Papers	66
Analysis of Interdisciplinarity Collaboration on Agricultural Researcher: Case Study on Indonesian Agency for Agricultural Research and Development (IAARD)	70
PhilAgriNet: The Missing Link Between Philippine Agricultural Knowledge and Researchers	77
Remote Sensing and GIS Applications For Agriculture and Precision Farming	
Introducing Software Product Line Development for Wireless Sensor Network	
Based Agriculture Applications	83
The Use of Low-cost Webcams for Field Monitoring in Agricultural Farm.....	89
Development of Variable Rate Fertilizer Applicator Module Based on 8-bit Embedded System	93
A Neural Network Architecture for Statistical Downscaling Technique:	
Case Study in Indramayu Districts.....	99
The Use of Hand Phone Camera to Determine Leaf Color Level of Paddy as a Reference for Fertilizing Dosage	105



1. Diarahkan mengutip sebagian atau seluruh karya tulis ini tanpa mencantumkan dan menyebutkan sumber:
a. Pengutipan hanya untuk kepentingan pendidikan, penelitian, penulisan karya ilmiah, penyusunan laporan, penulisan kritik atau tinjauan suatu masalah.
b. Pengutipan tidak merugikan kepentingan yang wajar IPB.

2. Dilarang mengumunkan dan memperbanyak sebagian atau seluruh karya tulis ini dalam bentuk apapun tanpa izin IPB.

Weeds and Plants Recognition using Fuzzy Clustering and Fractal Dimension Methods for Automatic Weed Control	109
Data Collecting in the Paddy Fields with GPS Receiver.....	113
Analysis of Environment and Physiological Data of Citrus Orchards by Using Field Server.....	114
Rice Management Indexes Study Using WMSN.....	120
E-Agricultural Services and Business	
A Conceptual Framework for Developing a Deep Web Service	122
Independence in Evaluating Web-Sites Within Ministerial Agriculture.....	127
E-Governance in Indonesia's Agricultural Development: an Analysis of Indonesia's Government Websites in Providing Agriculture Services.....	135
Determining the Quality Factors of The Web Portal of an Agriculture Educational Institute in Iran	136
Advocacy of positive environmental assessment using soil microbial diversity and its vitality value: As an index for environmental preservation effects in environmental accounting	137
The Sustainable Web Portal for Observation Data	141
Roles of Information Technologies for Small-scale Furniture Businesses.....	146
How Does Marketing Portal Work for Small-scale Furniture Producers?	156
Expanding Farm Business through Popular Social Network Site.....	164
Information Communication and Technologies in Agriculture Extension Services – A Boon or Bane: Experiences from Applications of 'Lifelines' in Mewat Region of India.....	169
ICT Mediated Agricultural Extension in Asia: Innovations and Lessons	170
Agricultural Video Portal as the Tools for Dissemination, Extension and Share Agricultural Technology .	180
Implementation in the Philippines of an Agricultural Expert System Framework in Thailand	186
The Use of Web Blog to Support Exchange of Information Technology and Marketing for Mangosteen Farmers in Singaparna District, Tasikmalaya Regency	192
Decision Support Systems for Agriculture and Agribusiness	
Predicting Tool for Rice Cultivation Possibility using SIMRIW.....	199
Development of Decision Support Systems for Agricultural Management: An overview in Japan	205
Management Information System for Watershed Development Programmes in India.....	211
Development of Computer Program for Designing of Transportation Packaging for Agricultural Products	218
Prediction of Stock and Price of Local Fruits in Jakarta with ANFIS (Adaptive Neuro Fuzzy System Inference).....	224
Development of Multiobjective Genetic Algorithms for Agri-food Supply Chain Design by Considering Global Climate Change	230
Framework of Intelligent Decision Support System for Agro-Industrial Supply Chain Management	236
Decision Support System of Small Scale Potato Agroindustry.....	242
Design and Implementation GA-Fuzzy for Land Suitability Evaluation	246
Development of a New System Approach to Land Use Sustainability with Various Interfaces.....	247



A Geographic Information Systems-Based Decision Support System for Solid Waste Recovery and Utilization in Tuguegarao City, Cagayan, Philippines	253
Computer Based Data Acquisition and Control in Agriculture	
Nondestructive Detection of Internal Insect Infestation in Jujubes Using Visible and Near-Infrared Spectroscopy	255
Critical Information Design for House Broilers	266
The Development of Automatic Coffee Sorting System Based on Image Processing and Artificial Neural Network	272
Development of Nondestructive Detection Algorithm for Internal Defects of Japanese Radish	276
A Hidden Markov Model for Starfruit Sugariness Recognition	280
Determination of Moisture Content in Mangosteen Pericarp Using Near Infrared (NIR) Spectroscopy	281
Real-time Solution Quality Control System based on Photonic Crystal Sensor	282
Water heat pump system in greenhouse by using underground water for snow melting	292
The Design of Wireless and Distributed Temperature Monitoring System for “Tungku Gama”	
Grains Dryer	299
Determination of Cocoa Bean Quality with Image Processing and Artificial Neural Network	300
Modelling and Simulation	
Shape and Vein Extraction on Plant Leaf Images Using Fourier and B-Spline Modeling	306
An UML Modeling for the Optimization of Supply Chain in Palm Oil Based Bioenergy	311
Heuristic Optimization Recurrent Neural Network Model to Predict Rain Fall Based on El-Nino Southern Oscillation (ENSO) Variable.....	316
Simulating Bioethanol Production from Sago Palm Cultivated on Peatland of West Kalimantan, Indonesia	322
The Allometric Model of Sago Palm Above Ground Drymatter Partitioning in Relation to Phenological Stages.....	326
Extended Enterprise Resources Planning (ERP) for CPO Industry	330
Water Resources Assessment for City Area	336
Sampling Frame of Square Segments for Rice Prduction Estimate and Forecast	339
Assessment of Agricultural Production in Dry Season in Nganjuk District, East Java, Indonesia	345
Poster Paper	
Enhanced Access to the CGIAR Virtual Library via Social Media	351
Determining Suitable Area for Dairy Farm Using Model Builder.....	354
Identification of Potential Area for Paddy Field to Increase Rice Production Using Model Builder and Its Publication on The Internet: Case of Lombok Island, West Nusa Tenggara, Indonesia	357
The Model Builder for City Park Using ArcGis	362
Application HEC-HMS to Predict Hydrograph	372



Development of Variable Rate Fertilizer Applicator Module Based on 8-bit Embedded System

P.A.S. Radite¹, Wawan Hermawan², Bregas Budiyanto³, Abdul Aziz⁴

e-mail: iwan_radit@yahoo.com

¹Lecturer, Dept. of Agric. Engineering, Fac. of Agric Eng. and Technology, Bogor Agricultural University Bogor, West Java, Indonesia

²Lecturer, Dept. of Meteorology and Geophysics, Fac. Of Mathematics and Natural Sciences, Bogor Agricultural University

³Master Student, Agric and Food Machinery Study Program, Dept of Agric Eng, Fac. of Agric Eng and Technology, Bogor Agricultural. University

ABSTRACT

Variable rate technology (VRT) is one of crucial component in precision farming implementation, and is now gaining popularity and widely accepted as one of smart solutions to sustain agriculture production without ignoring environmental impact. With VRT machines, the dose and the position of application could be given precisely as required by crops. Machinery with variable rate capabilities impressed as technologically sophisticated and expensive. In Indonesia, implementation of VRT in crop production is also still questioned, because fear of the complicated and expensive prices of the machines. Therefore, the objective of this research was to develop a prototype smart applicator to perform variable rate fertilizer application suitable for rice cultivation in Indonesia. Simple mechanism which result an affordable price of the machine will be considered in prototype. Therefore, to control the desired dose of application a rotor type metering device was chosen because it has simple mechanism since it could be directly powered by DC geared motor. In this study, the range of speed control is about 30 to 90 % of motor performance. Digital control with PID compensator was used in this system. Embedded system base on 8-bit micro-processor was adopted since it was cheap and available in the local market. The control module is developed based on this embedded system, where I2C (inter integrated circuit) communication protocol was used for hardware-software interfacing using C language programming. This paper will discussed bench test results of motor control. For field operation in the future, the developed VRT applicator will be mounted on multi-purpose vehicle which was modified from riding type rice transplanter. Position of the vehicle in the field will be acquired using agriculture type RTK DGPS.

Keywords : *embedded system, precision farming, smart applicator, 8-bit VRT module, VRT applicator*

1. INTRODUCTION

Preserving environment in farming is now becoming main concern especially in developed countries where high yielding varieties together with high intensive use of inputs including fertilizers and pesticides has been widely employed. It is the fact that since the introduction of synthetic ammonia as nitrogenous fertilizer after World War I, food production has been dramatically increased all over the world. According to FAO database, within 37 years since 1961 world food production in term of paddy equivalent has increased by 2.7 times and rice yield per hectare has been double, but total nutrients (N, P₂O₅, K₂O equivalent) input per agricultural land has also increased by 4.0 times^[1].

Of course, beside of maintaining high yield performance trend is now relying on preserving environment through the concept of site specific crop management or popular as precision farming. In fertilizer application, for instance, how to make effective use of chemical fertilizer became important point, as it is more realized that foot to foot of soil has different fertility and so productive potential. With this in mind, fertilizer management should, therefore, make advantages of soil and crop information.

The uniform conventional fertilizer application practice disregards the productive potentials of the various areas within the field. Thus, some area is less-fertilized and the other is over-fertilized. An increase of fertilizer generally increases the crop yield up to optimum level, but more fertilizer will be less utilized or mobilized. It is also an important issue recently that nitrogen from fertilizers may be lost into the atmosphere or enter streams through surface or subsurface drainage (leaching). Thus, over-fertilization is a potential source of pollution in the form of ammonia (NH₃), nitrite (NO₂), and nitrate (NO₃) which may pose a hazard to human health. Therefore, a contemporary issue is how to give an effective dose at the accurate position and right time for optimum growth of crops while preserving the environment without causing economic losses.

In the USA and Western Europe, precision farming practices have gained its popularity among farmers, and therefore many companies involved by providing new technology for those purposes, such as AgChem, AgriTrak,

Mid-Tech, Linco and many others. Precision farming technology by mean of using such as Global Positioning System (GPS), camera vision sensing, yield monitor, variable rate application, etc. is deeply researched and examined since 1997 at several places in Japan, followed by Korea, Taiwan and China.

Application of variable rate technology reported success to reduce fertilizer uses in rice paddy cultivation while production was maintained high in Japan. At topdressing operation, field with variable rate application consumed 12.8% less of NK fertilizer than that of the field with uniform rate application. It was reported that grain yield in dry basis for both treatment showed similar average value of 7.22 t/ha. Field with variable rate topdressing application showed less yield variability (CV was 4.2% and grain yield at 7.3 ± 0.3 t/ha was 72%) than field with uniform rate topdressing application (CV was 8.0% and grain yield at 7.3 ± 0.3 t/ha was 44.9%)^{[4],[5]}. The results mentioned enhance the possibility of applying variable rate fertilization or maintaining high yield with minimum variability.

With all explained, it is undoubtedly that precision farming could offer better solution for agriculture sustainable production in the future. Technology to implement precision farming relies on variable rate technology (VRT). Therefore, VRT is one of crucial component in precision practice, and is now gaining popularity and widely accepted as one of smart solutions to sustain agriculture production without ignoring environmental impact. With VRT machines, the dose and the position of application could be given precisely as required by crops. Machinery with variable rate capabilities impressed as technologically sophisticated and expensive. In Indonesia, implementation of VRT in crop production is also still questioned, because fear of the complicated and expensive price of the machines. Therefore, the objective of this research was to develop a prototype smart applicator to perform variable rate fertilizer application suitable for rice cultivation in Indonesia. Simple mechanism which result an affordable price of the machine will be considered.

II. VARIABLE RATE APPLICATOR DESIGN

2.1. Vehicle

Concept design of developed VRT granular fertilizer applicator is shown in Figure 1. In this concept, the applicator is mounted on a multipurpose vehicle or light tractor using three-point hitch. The concept of VRT applicator has four main components, electric parts (motor and controller), fertilizer bins with total capacity 120 l, 2-4 metering devices and 4- 8 nozzle spreaders.

The applicator works as follow; first the fertilizer was metered by a roller feeder, the grains are then released gravitationally or transported pneumatically by pressured air stream, through delivery hoses and finally put in the soil. The fertilizer is put into the soil to dept of 5-10 cm, in order to avoid vapor losses in dry season or losses due to water runoff during rainy season.

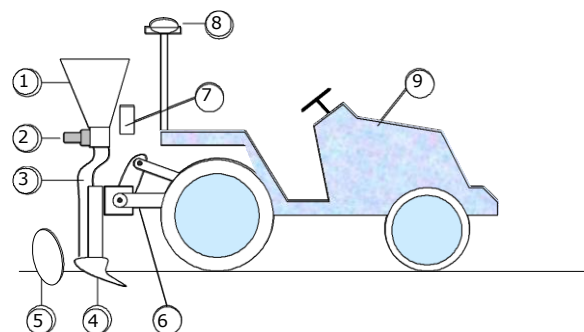


Figure 1. Concept of variable rate applicator

As shown in Figure 2, computer or controller module was utilized to organize the system. This machine performed variable rate application based on fertilization mapped. The map contained desired rates of application (kg/ha) as well as their position in the field will be used to guide the operation of the machine in the field. Change of the desired application rate was implemented by precisely control the rotor speed of metering device while monitoring the ground speed of the vehicle. An agriculture purpose RTK-DGPS with accuracy of 5 to 10 cm is used to perform accurate positioning during fertilization, and the data were sent to the PC computer through serial port (RS232) at 5 Hz. While the speed of the vehicle was monitored, through the vane disc and a magnetic proximity sensor

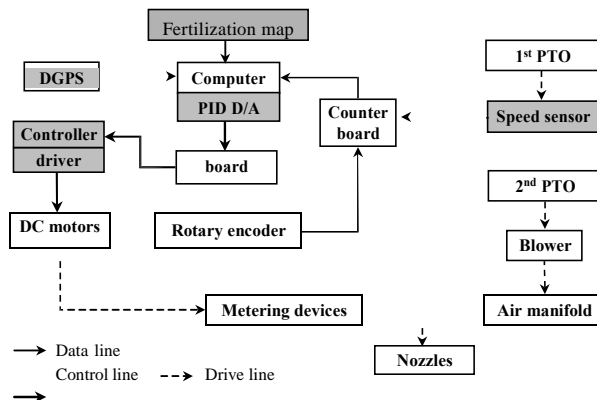


Figure 2. System control of variable metering.

2.2. Metering device

The accuracy of metering device is the heart of fertilizer performance. Positive volumetric displacement type of metering rotor is used. The fertilizer feeders were star-types with 6 fins, while the pesticide feeders were solid rollers with cylindrical notched chambers. The fins of the two feeders were shifted about 30° to reduce the peak of rotor's torque and the fluctuation of fertilizer output when the applicator was operated in double feeder mode. The fertilizer feeders had theoretically volume of 22.8 cm^3 per rotation. Figure 3 shown a schematic of the metering mechanism. No agitator is needed inside the hoppers and the

motors are only the moving parts in the mechanism. Tests of metering devices of this type showed that their output rates (g/s) were proportional to rotor speed when they were operated up to 85 rpm^[5]. Therefore, range of controlled operation of the metering device in this research is set below 85 rpm.

Metering devices showed that its output rate (g/s) was proportional to rotor speed, when it was operated up to 85 rpm. For single roller feeder, if the rate of application is decided, the rotor speed (Nm, in rps) can be simply calculated as follows:

$$N_m = (10 S W D_s) / Q \quad (1)$$

where,

S = Ground speed of the applicator [m/s]

W = Effective width covered by one metering device [m]

Ds = Rate of application [kg/ha]

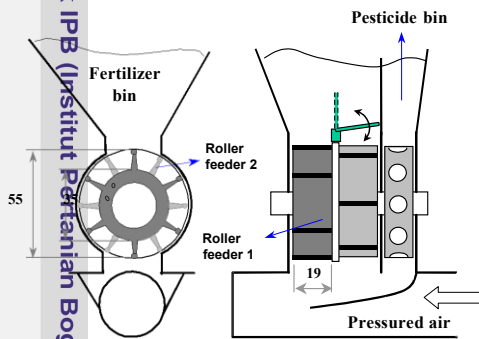


Figure 3. Schematic of metering device

3.3. Motor and Controller

DC geared motor was use in this design because it is tough and reliable for field application, beside it is also cheap and availability in local market. Through a careful design a DC motor can be directly coupled to the shaft of fertilizer metering device for simple construction. A 30 W dc motor has specification of 22 V/ 2600 rpm equipped with 1/20 reduction gear box. The whole system is knock-down, thus easy for maintenance. To measure speed of the motor for feedback control system, an optical rotary encoder was used. The encoder gives output of 30 pulses per rotation.

The controller module for metering system controller consists of microcontroller module (DT-51 Minsys), Smart Peripheral Motor Controller (SPC Motor Controller), and motor driver (EMS Hybrid 30A) made in Innovative Electronics. For flexibility, a 3 x4 keypad was functioned as input device, while a 2 x 20 line LCD display was used as output of the controller. With input and output devices, the controller parameters could easily be adjusted and the result could be easily monitored.

The specification microcontroller used was 8 bit micro-processor base on AT89C51, 8kb EEPROM expandable to 64k, 4 I/O ports (PPI portA, portB and portC, port1), LCD port, and serial port interface for communication with PC computer, laptop or netbook.

A pulse width modulation (PWM) driver (EMS Driver from Innovative Electronics) with hybrid transistors was used. The motor driver has ranges output up to 36 V at maximum current up to 30 A. This driver was interfaced to micro-controller through Smart Peripheral Controller (SPC). SPC motor controller has 2 channel input driver, equipped with four 16 bit counters. Communication between SPC, EMS driver and micro-controller could utilize i2c protocol, UART or parallel port.

III. MATERIAL AND METHOD

3.1. Materials of experiment

Design of granular fertilizer applicator with volumetric metering system is adopted and modified to become variable output. Variable dose is performed by controlling the rotation of metering device rotor by meant of controlling the rotation of a dc gear motor. With digital control it is possible to set the desired speed of the rotor very precise and accurate.

For this purposed, material of experiment will be consists of metering device, dc geared motor, rotary encoder, counter, interface controller, motor driver, usb to serial port and laptop computer. Computer was use to program the micro-controller, and also to monitor and record the data during process development. C programming language was use to developed the system control and data acquisition. Data acquisition was done through serial communication by using usb to RS-232 cable. Data were displayed in the laptop monitor and recorded in computer's hard drives. Microsoft excel was used to do further data processing.

In this technique, the map-based application method was adopted. In this method, soil and plant were sampled and laboratory analyzed prior to fertilizer application. After further calculations, a fertilization map was constructed. The fertilization map contained information of the required application rates (kg/ha) on each plot in the field. The work of soil and plant analysis was conducted by another team of precision farming research, and there is not discuss further.

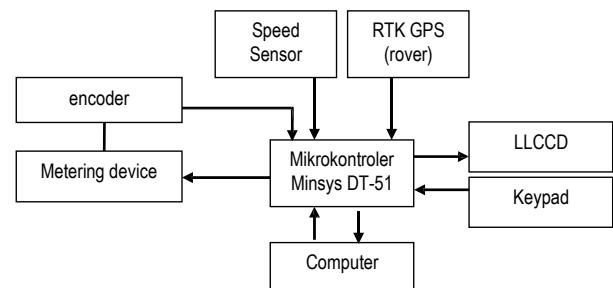


Figure 4. Block diagram of control system

Block diagram of the system is presented in Figure 4. To performed variable rate application in the field, micro-controller should manage information of vehicle accurate dose of application. The change of rate of application is done by precisely control the metering rotor while monitoring the vehicle's ground speed. The ground speed

was measured by a segmented vane disc and a proximity sensor will be sampling at 1Hz. While an agriculture purposes RTK-DGPS having accuracy 5 to 10 cm will be used to perform accurate positioning in real time (5Hz) during field operation.

Method of controlling the metering device

System identification

The metering system approximated with linear model of first order system with delay, as represented in Laplace transform as follows;

$$G(s) = \frac{R(s)}{C(s)} = \frac{Ke^{-ds}}{1 + Ts} \quad (2)$$

Where,

R = speed of rotor or output of control

C = set point or input control

K = gain of system (rps)

T_s = time constant (s)

d = delay time (s)

The value of K , T and d was determined by using step response model. Curve fitting using Least Square Method was adopted to fit data of response and model as stated in equation (2). Procedure of system identification is presented in figure 5.

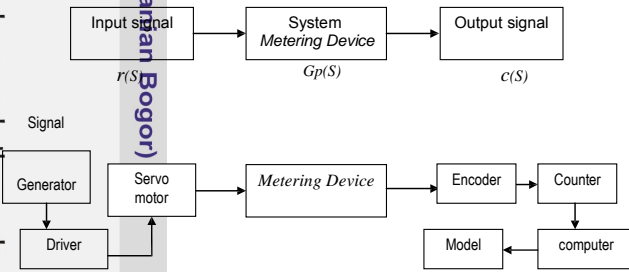


Figure 5. Schematic of system identification

To find the value of K , T_s and d , curve fitting was done in time domain using time difference model where Laplace variable s was approximated by z transform as follows:

$$s = \frac{1}{2T_s} \left(\frac{1 - z^{-1}}{1 + z^{-1}} \right) \quad (3)$$

so that,

$$c_n = \frac{K \left(r_{n-d/T_s} + r_{n-1-d/T_s} \right) - c_{n-1} \left(1 - \frac{2T}{T_s} \right)}{\left(1 + \frac{2T}{T_s} \right)} \quad (4)$$

Where,

r_n : discrete values of a unit step at n^{th} time

T_s : is period of sampling (s)

c_n : discrete output at n^{th} time, rotor speed of the metering device (rps)

Digital PID Control

Digital control based on embedded system will be used in this research. A feedback control with a digital PID compensator, therefore, was adopted to improve the robustness of control. For this purpose, the rotor speed was monitored using an optical rotary encoder with resolution 30 pulses per rotation. A 16 bit counter was used to count the pulses every 20 ms.

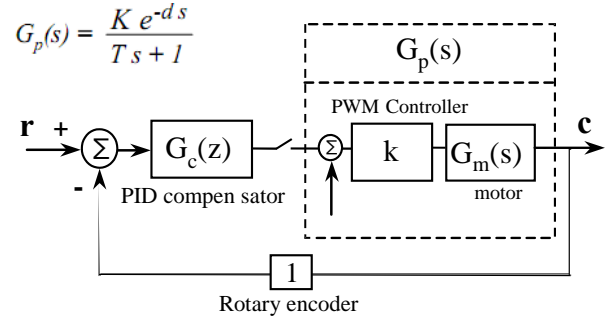


Figure 6. Schematic diagram of digital control

A feedback control is designed to generate an output that causes some corrective effort to be applied to a process so as to drive a measurable process variable(r) towards a desired value(c) known as the set-point, as shown in Figure 5. PID digital is implemented as follows:

$$C_n = C_{n-1} + K_p \left[(e_n - e_{n-1}) + K_i T e_n + \frac{e_n - 2e_{n-1} + e_{n-2}}{T} \right] - K_D \quad (3)$$

Where,

C_n = next value of control

e_n = error of process

K_p , K_i , K_D is PID constant for proportional, integral and differential component.

IV. RESULT AND DISCUSSION

4.1.Motor performance

The DC gear motor that was tested had good linearity characteristic with respect to control voltage of 4 to 24 volt, as shown in figure 6.

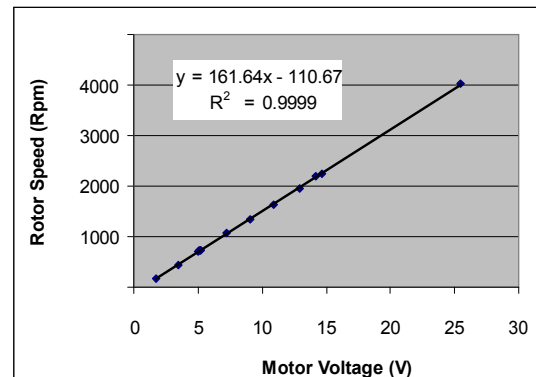


Figure 6. Rotor speed versus input voltage

When the voltage was expressed in term of PWM (pulse width modulation) values (0 to 255) as control input, the relationship was not linear. However, it has polynomial 3rd order, as shown in Figure 7. The calibration curve mentioned is important to give initial setting command to the controller.

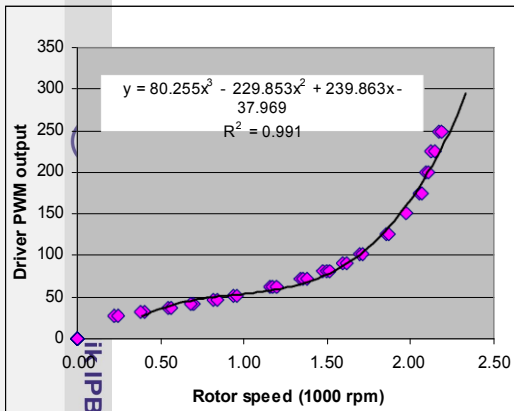


Figure 7. PWM output of motor driver versus rotor speed

4.2. Modeling of motor

Open loop control was done with PWM set point 50, 100, 150, and 250 respectively to run the motor. The speed of the rotor was then monitored and recorded in laptop computer at sampling rate of 30 ms. Rotary encoder was used to sense the rotation speed of the rotor, and output pulse was then counted using 16 bit counter. The data was then plot and curved fitted using model in equation (4), and the result is presented in Figure 8.

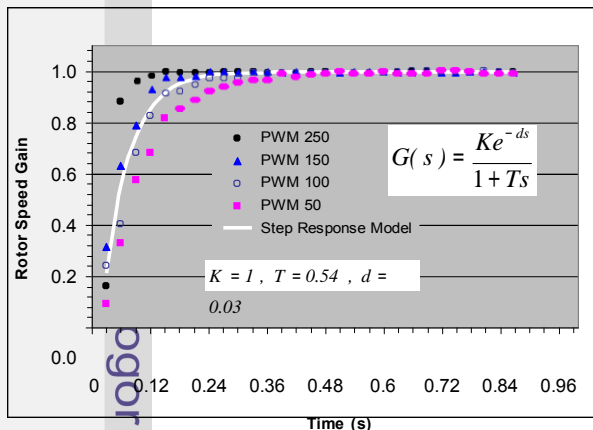


Figure 8. Step response model of system

In order to tune the compensator, the process gain K , the time constant T and the dead time d of the system were determined in the same manner as previously explained.

4.3. PID control

Without properly controlled, motor could not give precise response, for example of stair step set point change as illustrated in Figure 9. Though the value of set point command calculated based on calibration curve as in Figure 7, not all setting speeds of the rotor could be followed

precisely. However, this process could be improved as feed back control is applied in the system as it was shown in Figure 9, where all the setting points could be followed very precise in quick response either in low speed as well as high speed rotation of rotor.

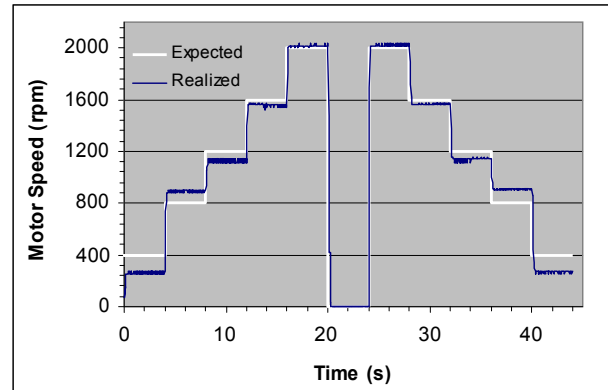


Figure 9. Step response of motor without control

In order for control loop to work properly, the PID compensator must be properly tuned. Process gain was defined as rotor speed per second (rps) output (Hz) per unit of controller input. Least square fitting was used, where the process gain $K = 1$, time constant $T = 0.054s$ and dead time $d = 0.030s$. Tuning of the controller was done using modified Ziegler-Nichols method, where the PID constants were defined as the following equations, where:

$$\begin{aligned} K_p &= C_p \cdot 1.2 T / (K d), \\ K_i &= C_i \cdot 0.5 / d \text{ and} \\ K_d &= C_d \cdot 0.5 d. \end{aligned} \quad (5)$$

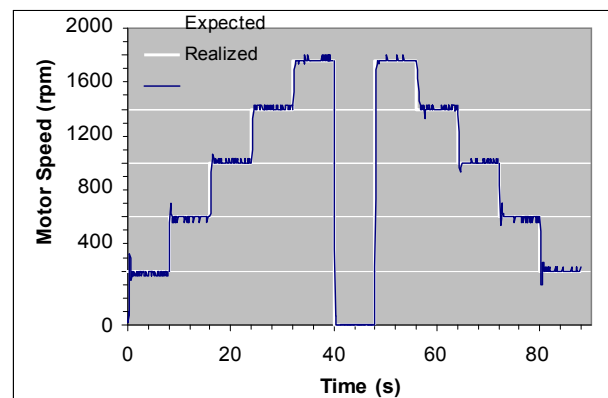


Figure 10. Stair step response of motor with PID control

Tough the torque on the rotor fluctuated because of frictions and other causes, such as cyclic loading as well as various granules sizes, the controller able to maintain the speed of motor in a good accuracy. It is shown in Figure 4.10, digital PID compensator obviously improved the performance of motor compared to the previous one. When control loop was run at 16 Hz or period of sampling 60 ms, the best performance was found when $C_p = 3.86$; $C_i = 0.0002$; $C_d = 0.1667$. However, the parameters value will



1. a. To be explored further to minimized disturbance due to the variation of fertilizer size in the next experiments.
2. b. Dilarang mengemukakan dan memperbanyak sebagian atau seluruh karya tulis ini dalam bentuk apapun tanpa izin IPB.

CONCLUSIONS

A prototype of embedded control module for variable granular applicator has been constructed and tested. The current module used 8bit micro-controller equipped with LCD display and keypad for user interface input output. Peripheral modules could be used

The necessity of quick and accurate response of rotating motor which is needed for variable rate metering mechanism could be fulfilled by using cheap dc geared motor equipped with encoder which is digitally controlled. For the purpose, the PID compensator should be properly tuned in order to get precise response to wide various stair step response which simulate the capability of variable rate of the machine.

ACKNOWLEDGMENT

The authors gratefully acknowledge the support of the, Directorate General of Higher Education, Ministry of National Education of Indonesia through IPB I-MHERE Competition Scheme Project which provided a research grant for this work.

REFERENCES

- [1] Electronic publication : FAO Statistical Database, Food and Agriculture Organization of United Nation. 2000 Website: <http://apps.fao.org/default.htm>
- [2] Lee, C. K., M. Umeda, J. Yanai, M. Iida, T. Kosaki, "Grain Yield and Soil Properties in Paddy Field", ASAE/CSAE- SCGR 1999 Annual International Meeting 1999. , Toronto CANADA, Paper No. 991057.
- [3] Iida, K., M. Suguri, M. Umeda and T. Matsui, "Estimation of nitrogen content using machine vision in a paddy field", 2000 ASAE Annual International Meeting, Milwaukee, Wisconsin, USA, paper No.003021.
- [4] Sinivasan, A., "Precision farming in Asia: Progress and prospects". Proc. of the 4th International Conference on Precision Agriculture, 19-22 July 1998, St. Paul, USA. Available
- [5] Radite, P.A.S., M Umeda, M. Iida, M. Khilael, "Variable rate applicator for paddy field". 93rd Intl meeting of ASAE, Milwaukee Wisconsin, USA., 9-12 July, 2000. ASAE paper No.001156
- [6] Iida, Michihisa, M. Umeda, P. A. S. Radite, "Variable Rate Fertilizer Applicator for Paddy Field". 94rd Intl meeting of ASAE, Sacramento, California, USA, July 29-August 1, 2001. ASAE paper No. 011115.